
HUBTRAC

"JOURNEY TO THE FUTURE"



TRUCK AND BUS RADIAL TYRE

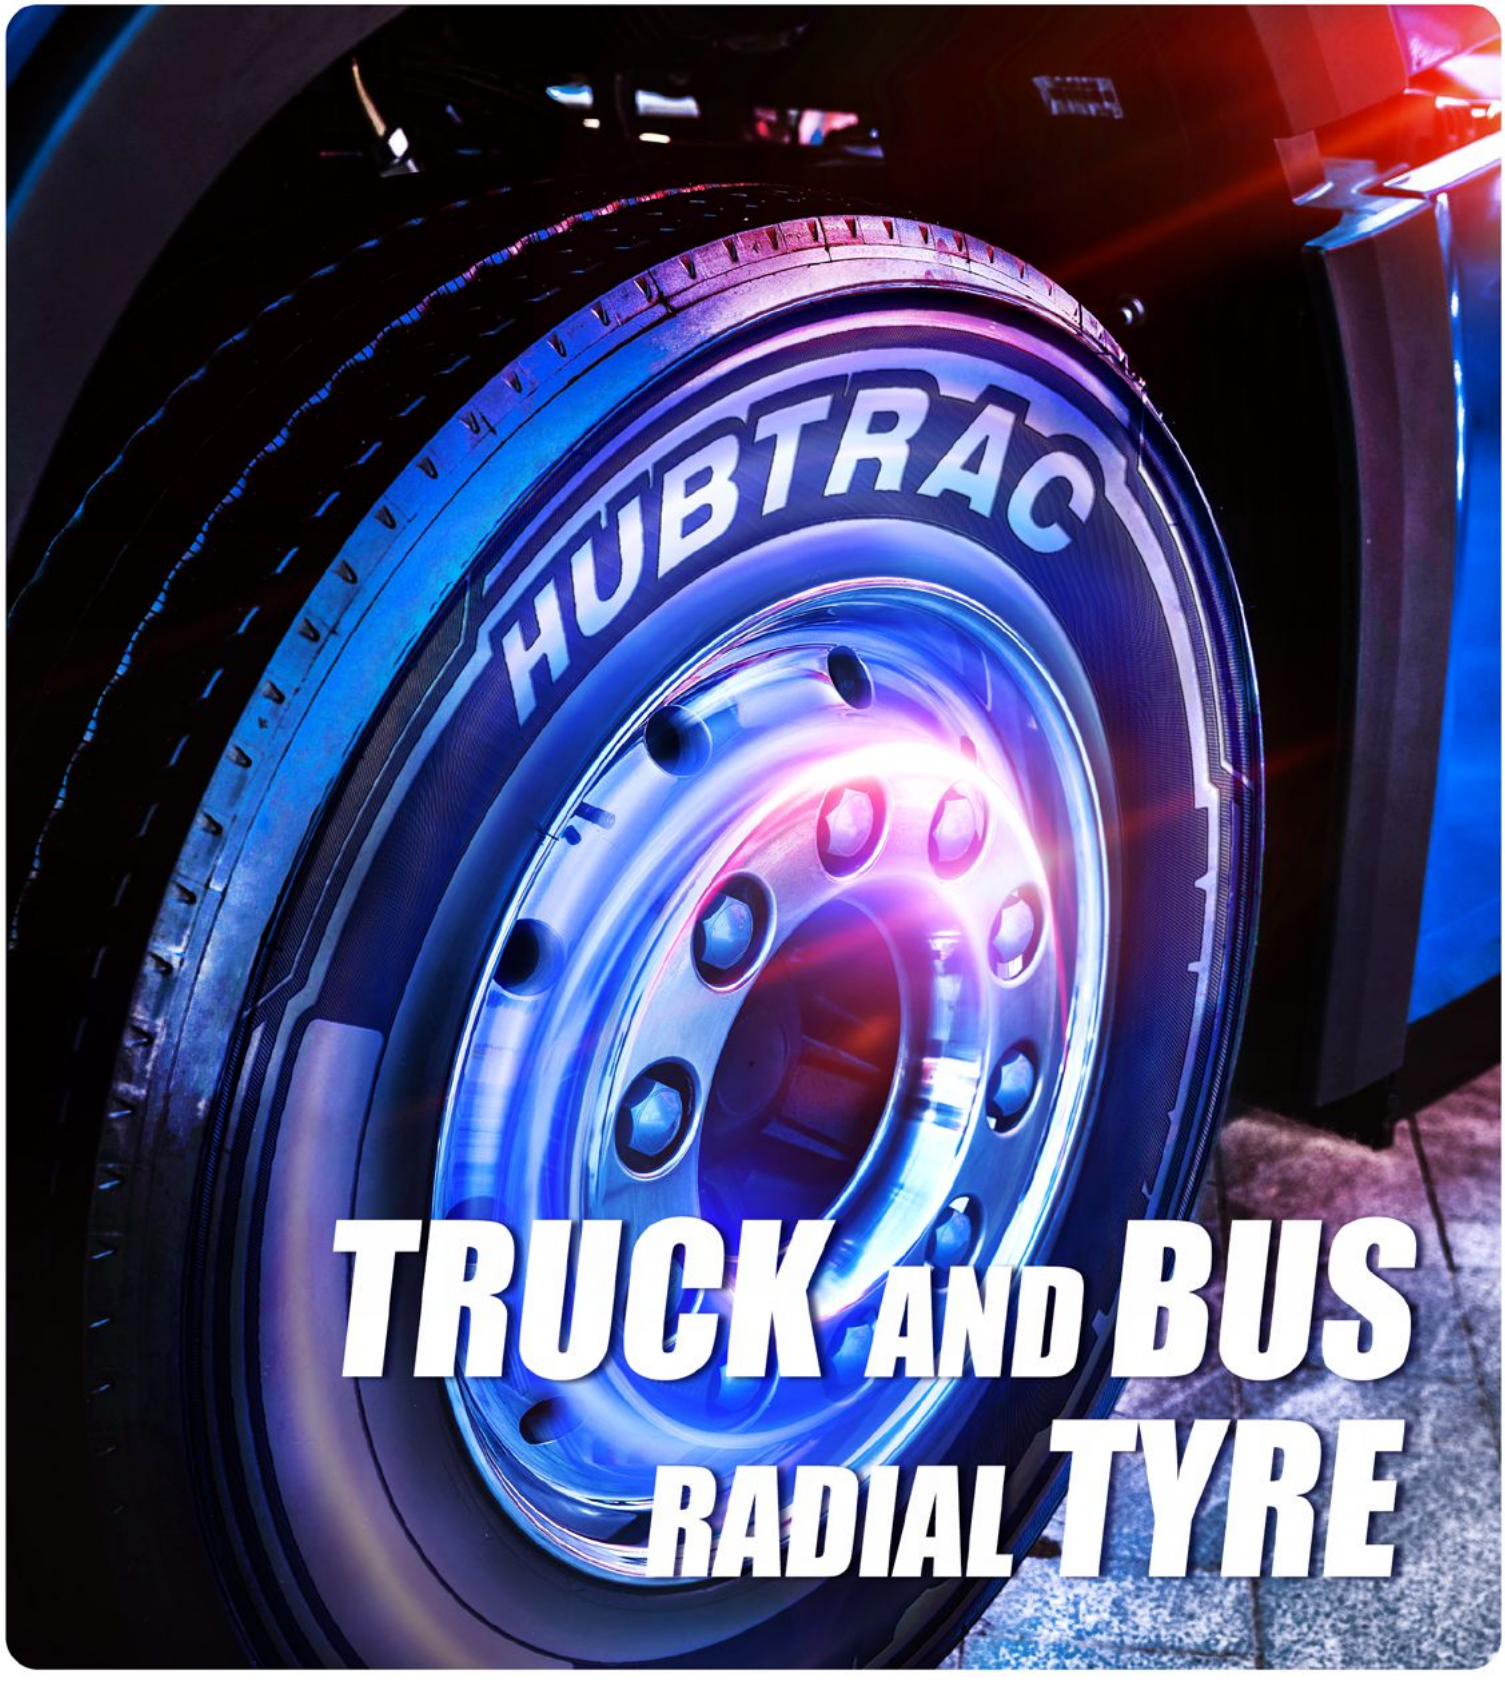

COMPANY PROFILE

Shandong Linglong Tyre Co., Ltd., founded in 1975, has been among top 14 global tire manufacturers and top 3 Chinese tire manufacturers with over 40-year forging ahead. Currently, the company has six R&D centers, seven manufacturing bases across the world, and over 16,000 employees, with its products widely used on passenger vehicles, commercial vehicles, and engineering machinery vehicles.

Linglong Tire had successful access to the A share market on July 6, 2016. It has been included in the three international indexes, the MSCI Index, the FTSE Russell Index and the S&P Emerging Market Indexes, winning the unanimous favor of the international capital market.

The factory has built diversified brand system for different markets. HUBTRAC is a new brand released to the market, mainly involving TBR and special tires. The brand is committed to creating profit and value for all customers, developing Linglong Tyre to be one of the best world-class and well respected tyre manufacturers all over the world.

SHANDONG LINGLONG TYRE CO., LTD.

Linglong collects global extraordinary wisdom to demonstrate intelligent Linglong with technological innovation. The company has established R&D institutions in Germany, America, Beijing, Shanghai, Yantai and Zhaoyuan, owning national enterprise design center, national recognized testing laboratory and national industrial design center, to form global integrative R&D pattern. Until now, the company has obtained over 700 authorized patents in total, undertaken 91 national and industry standards formulation, as well as 11 national innovation projects.

Through its leading innovative strength, Linglong successfully developed dandelion rubber tire, graphene reinforced tread tire, racing tire, 3D printing polyurethane tire, run-flat tire, and low odor tire, leaving a positive and far-reaching impact on environmental protection and industry development. It was awarded Second Prize of National Award for Technological Invention, Second National Prize for Progress in Science and Technology and China Industry Award which is the highest award in China's industry field.

Linglong has sponsored over 90 sports events and teams worldwide, such as Juventus and VfL Wolfsburg, to enhance its brand awareness and influence. It strengthens the retail network construction, with more than 30,000 marketing outlets globally, promoting its brand reputation and customer loyalty through reliable product quality and excellent service. To attracting more target consumers, the company launches at airports and high-speed rail stations in major cities across the world and several CCTV programs. For many years, Linglong has been participating SEMA show and Automechanika Dubai etc. to enhance its product reputation and build the international brand image. Linglong's Brand Value Reaching RMB 51.967 Billion in 2020.

The company's products are exported to over 180 countries and regions across the world, covering Europe, Middle East, Americas, Asia Pacific, and Africa, and provides OE service for over 100 manufacturing bases of 60 global well-known automakers. It successfully provides OE tire for Red flag state guest car and becomes global suppliers of world first class automakers like Audi, Volkswagen, Ford.



Sino-Asia Tire Proving Ground


World-class belt cutting machine



Dezhou Linglong tire plant layout


The world's leading one-step passenger car tire building system


Six-component laboratory


Embryo automatic logistics transportation system


Traveler automatic unloading robot

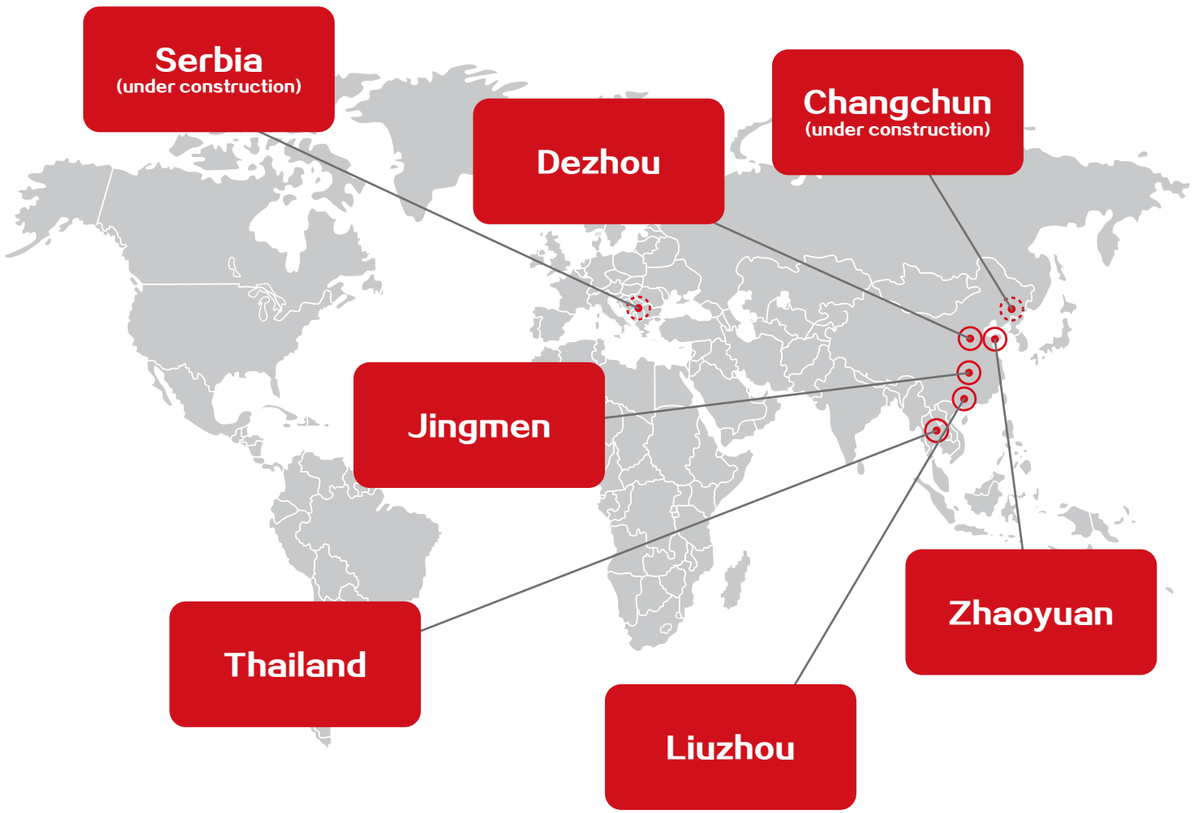

6+6 GLOBALIZATION STRATEGY

In order to promote its high-quality global industrial layout and increase its core brand competitiveness in global market, Linglong formulates its 6+6 global layout to build six Chinese manufacturing bases as well as six overseas manufacturing bases. At present, the company has five Chinese manufacturing bases in Zhaoyuan, Dezhou, Liuzhou, Jingmen, Changchun (under construction) and two overseas manufacturing bases in Thailand and Serbia (under construction). Meanwhile, Linglong will carry out active inspection of its new factory's location, aiming at completing the full completion of 6+6 global layout, and fully utilizing global resources and expanding its global tire market.

In the future, the company will fully implement its 6+6 global layout and six internationalization, fully improve its core competitiveness, and strive to achieve its annual production and sales volume reaching 160 million units, sales revenue of over RMB 80 billion and production capacity among global top five tire manufacturers by 2030, becoming a technology-oriented enterprise among s with world-class technology, management and brand influence.

SPORTS MARKETING














SUPPORTING BRANDS

Supporting domestic brands

红旗 | 一汽奔腾 BESTUNE | 上汽通用五菱 SGMW | 宝骏汽车 | BAOJUN | 吉利汽车 GEELY AUTO | LYNK&CO | 长安汽车 CHANGAN | 长安欧尚
CHERY | 比亚迪汽车 BYD AUTO | 长城汽车 | 哈弗 HAVAL | 广汽传祺 | JMC 江铃汽车 | 东风 | 启辰 | 金杯 | 北京汽车 BAIC MOTOR
WELTMEISTER 威马汽车 | 凯翼汽车 COWIN AUTO | 一汽解放 | 中国重汽 SINOTRUK | 陕汽重卡 | FOTON 福田汽车 | 东风柳汽 | 上汽红岩 HONGYAN | DFAC
JAC 江淮汽车 | 大运重卡 | CIMC 中集 | KING LONG 金龙客车 | GOLDEN DRAGON 金旅客车 | 宇通客车 | LiuGong 柳工 | SDLG 山东临工 | SANY

Supporting foreign and joint venture brands


Ford 长安福特 | NISSAN 东风日产 | 广汽三菱 | 庆铃汽车 | SAIC

RENAULT NISSAN MITSUBISHI | 一汽-大众 FAW-VOLKSWAGEN | JETTA | 上汽大众 SAIC VOLKSWAGEN | ŠKODA | SEAT | 上汽通用汽车 SAIC-GM

PRODUCT MAP

	Long Haul	Regional	On/Off Road	Mine	Urban
					
Steer	 HIGHWAY S11 HIGHWAY S12	 REGIONAL S11 REGIONAL S12 REGIONAL S15 REGIONAL S16 REGIONAL S17			
Drive	 HIGHWAY D11 HIGHWAY D12 HIGHWAY D15 HIGHWAY D16	 REGIONAL D11 REGIONAL D12 REGIONAL D15 REGIONAL D16 REGIONAL D17	 MIXED D11 MIXED D12	 MINE D11 MINE D12	
Trailer	 HIGHWAY T11 HIGHWAY T12	 REGIONAL T11 REGIONAL T12 REGIONAL T15	 MIXED T11		
General		 REGIONAL G11 REGIONAL G12 REGIONAL G15	 MIXED G10 MIXED G11 MIXED G12 MIXED G15 MIXED G16		 URBAN G11

SIDEWALL MARKING INSTRUCTION

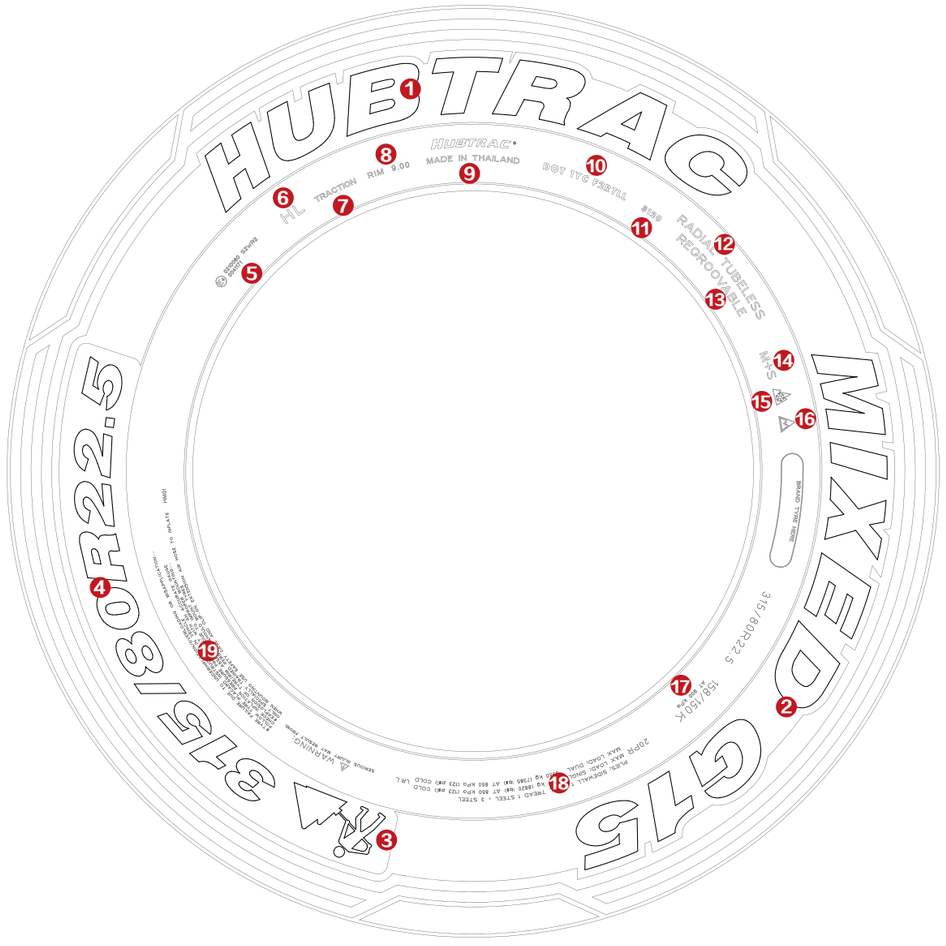

1. Brand Name
2. Pattern Name
3. Application Symbol
4. Size
5. ECE Certification
6. Suitable for EURO 6 Regulations
7. Suitable for Drive Position
8. Recommend Rim
9. Place of Production
10. DOT Certification
11. Week & Year of Production
12. Tire Type
13. Can be re-engraved
14. Suitable for Mud & Snow Conditions
15. Suitable for Severe Snow Conditions
16. Suitable for Severe Ice Conditions
17. Load Index & Speed Symbol
18. Tyre Internal Structure, Ply Rating, Max.Air Pressure and Max. Load Capacity
19. Warning Instructions for Use

PATTERN NAMING RULES

REGIONAL

LONG HAUL
Wear-resistance and heat-dissipation for high quality and long distance conditions

REGIONAL
Durability and applicability for a variety of medium and short distance conditions

MIXED
Cut-resistance and traction for a variety of construction conditions

MINE
Security and traction for extremely stringent mines and forests conditions

WINTER
Maneuvering stability and braking force for snow and ice conditions

URBAN
Wear resistance and handling for a variety of city and intercity conditions



S 1 2

S : Steer
D : Drive
T : Trailer
G : General

1 — Generation serial number

2 — Pattern serial number


CONTENT

01 LONG HAUL
11 REGIONAL
29 ON/OFF ROAD
39 MINE
43 URBAN
45 TECHNICAL DATA
51 WARRANTY POLICY

LONG HAUL

HIGHWAY S11





M+S

- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- Low rolling resistance,reducing fuel consumption.
- Lasting grip and stability by hidden groove design.
- New pattern design,improving mileage for long distance transportion.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	295/60R22.5	9.00	16	150/147L	-	3350	900	3075	900	926	292	13.0
2	295/80R22.5	9.00	16	152/148M	-	3550	850	3150	850	1044	298	14.0
3	295/80R22.5	9.00	18	154/149M	-	3750	850	3250	850	1044	298	14.0
4	315/60R22.5	9.75	16	152/148L	-	3550	900	3150	900	950	313	14.5
5	315/60R22.5	9.75	18	154/150L	152/148M	3750	900	3350	900	950	313	14.5
6	315/70R22.5	9.00	16	154/150L	152/148M	3750	900	3350	900	1014	312	15.0
7	315/70R22.5	9.00	18	156/150L	154/150M	4000	900	3350	900	1014	312	15.0
8	315/80R22.5	9.00	18	154/150M	-	3750	825	3350	825	1076	312	15.0
9	315/80R22.5	9.00	20	156/150L	154/150M	4000	850	3350	850	1076	312	15.0
10	315/80R22.5	9.00	22	158/150L	154/150M	4250	900	3350	900	1076	312	15.0
11	385/55R22.5	12.25	18	158L	-	4250	850	-	-	996	386	12.0
12	385/55R22.5	12.25	20	160K	158L	4500	900	-	-	996	386	12.0

Remark : The above technical data are for reference only .



HIGHWAY S12





Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort

- Decoupling groove helps resist uneven shoulder wear.
- Straight five-rib tread design with four grooves provides improved handling.
- Variable zigzag groove help to reduce groove crack.
- Specially reinforced sidewall design.


No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	11R22.5	8.25	14	144/142M	-	2800	720	2650	720	1054	279	14.5
2	11R22.5	8.25	16	146/143M	-	3000	830	2725	830	1054	279	14.5
3	11R24.5	8.25	14	146/143M	-	3000	720	2725	720	1104	279	14.5
4	11R24.5	8.25	16	149/146M	-	3250	830	3000	830	1104	279	14.5
5	285/75R24.5	8.25	14	144/141M	-	2800	760	2575	760	1050	283	14.5
6	285/75R24.5	8.25	16	147/144M	-	3075	830	2800	830	1050	283	14.5
7	295/75R22.5	9.00	14	144/141M	-	2800	760	2575	760	1014	298	14.5
8	295/75R22.5	9.00	16	146/143M	-	3000	830	2725	830	1014	298	14.5

Remark : The above technical data are for reference only .



HIGHWAY D11







Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort


- Low rolling resistance，reducing fuel consumption.
- Lasting grip and stability by hidden groove design，with M+S and 3PMSF marking.
- New pattern design，improving mileage for long distance transportion.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	295/60R22.5	9.00	16	150/147L	-	3350	900	3075	900	926	292	16.0
2	295/80R22.5	9.00	16	152/148M	-	3550	850	3150	850	1044	298	16.0
3	315/60R22.5	9.75	16	152/148L	-	3550	900	3150	900	950	313	16.5
4	315/70R22.5	9.00	16	154/150L	152/148M	3750	900	3350	900	1014	312	16.5
5	315/70R22.5	9.00	18	156/150L	154/150M	4000	900	3350	900	1014	312	16.5
6	315/80R22.5	9.00	18	154/150M	-	3750	825	3350	825	1076	312	17.0
7	315/80R22.5	9.00	20	156/150L	154/150M	4000	850	3350	850	1076	312	17.0

Remark : The above technical data are for reference only .

HIGHWAY D12







Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort


- Closed shoulder design optimizes the footprint for even wear and long tread life.
- The combination of lateral and zigzag center grooves for good braking and grip on wet road.
- Low rolling resistance reduces fuel consumption.
- Strong carcass materials help promote tire durability and provide tire retreadability.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	11R22.5	8.25	14	144/142L	-	2800	720	2650	720	1065	279	22
2	11R22.5	8.25	16	146/143L	-	3000	830	2725	830	1065	279	22
3	11R24.5	8.25	14	146/143L	-	3000	720	2725	720	1116	279	22
4	11R24.5	8.25	16	149/146L	-	3250	830	3000	830	1116	279	22
5	285/75R24.5	8.25	14	144/141L	-	2800	760	2575	760	1066	283	22
6	285/75R24.5	8.25	16	147/144L	-	3075	830	2800	830	1066	283	22
7	295/75R22.5	9.00	14	144/141L	-	2800	760	2575	760	1026	298	22
8	295/75R22.5	9.00	16	146/143L	-	3000	830	2725	830	1026	298	22

Remark : The above technical data are for reference only .

HIGHWAY D15







Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort


- Tread design helps deliver all-season traction and reduction of uneven wear.
- Reduces weight for increased playload(Compared to duals).
- Construction optimized for fuel economy and long life.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	445/50R22.5	14.00	18	155L	-	3875	700	—	—	1024	445	20
2	445/50R22.5	14.00	18	158L	-	4250	760	—	—	1024	445	20
3	445/50R22.5	14.00	20	161L	-	4625	830	—	—	1024	445	20
4	445/50R22.5	14.00	20	161L	-	4625	850	—	—	1024	445	20

Remark : The above technical data are for reference only .

HIGHWAY D16







Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort


- Shoulder and center block design provides traction in all conditions.
- Low heat generation with semi-open shoulder grooves.
- Variable zigzag groove help to reduce groove crack.
- Strong carcass materials help promote tire durability and provide tire retreadability.


No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	11R22.5	8.25	14	144/142M	-	2800	720	2650	720	1065	279	22.0
2	11R22.5	8.25	16	146/143M	-	3000	830	2725	830	1065	279	22.0
3	11R24.5	8.25	14	146/143M	-	3000	720	2725	720	1116	279	22.0
4	11R24.5	8.25	16	149/146M	-	3250	830	3000	830	1116	279	22.0
5	285/75R24.5	8.25	14	144/141M	-	2800	760	2575	760	1066	283	22.0
6	285/75R24.5	8.25	16	147/144M	-	3075	830	2800	830	1066	283	22.0
7	295/75R22.5	9.00	14	144/141M	-	2800	760	2575	760	1026	298	22.0
8	295/75R22.5	9.00	16	146/143M	-	3000	830	2725	830	1026	298	22.0

Remark : The above technical data are for reference only .

HIGHWAY T11







Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort

- Low rolling resistance,reducing fuel consumption.
- Lasting grip and stability by hidden groove design.
- New pattern design ,improving mileage for long distance transportion.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	385/55R19.5	12.25	18	156J	-	4000	900	-	-	919	386	12.5
2	385/55R22.5	12.25	18	158L	-	4250	850	-	-	996	386	12.0
3	385/55R22.5	12.25	20	160K	158L	4500	900	-	-	996	386	12.0
4	385/65R22.5	11.75	20	160K	158L	4500	900	-	-	1072	389	13.5
5	385/65R22.5	11.75	24	164K	158L	5000	900	-	-	1072	389	13.5
6	425/65R22.5	12.25	20	165K	-	5150	825	-	-	1124	422	14.5
7	435/50R19.5	14.00	18	156J	-	4000	850	-	-	931	438	12.5
8	435/50R19.5	14.00	20	160J	-	4500	900	-	-	931	438	12.5
9	445/45R19.5	15.00	18	156J	-	4000	900	-	-	895	446	12.5
10	445/45R19.5	15.00	20	160J	-	4500	900	-	-	895	446	12.5

Remark : The above technical data are for reference only .



HIGHWAY T12





Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort

- Suitable for on-highway trailer application.
- Reduces weight for increased playload(VS duals).
- Construction optimized for fuel economy and long life.
- Special tread design for fuel economy.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	445/50R22.5	14.00	18	155L	-	3875	700	-	-	1018	445	10.5
2	445/50R22.5	14.00	18	158L	-	4250	760	-	-	1018	445	10.5
3	445/50R22.5	14.00	20	161L	-	4625	830	-	-	1018	445	10.5
4	445/50R22.5	14.00	20	161L	-	4625	850	-	-	1018	445	10.5

Remark : The above technical data are for reference only .

REGIONAL



REGIONAL S11





- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- Reduces weight for increased playload(Compared to duals).
- Construction optimized for fuel economy and long life.
- Special tread design for fuel economy.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	295/60R22.5	9.00	16	150/147L	-	3350	900	3075	900	926	292	14.0
2	295/80R22.5	9.00	16	152/148M	-	3550	850	3150	850	1044	298	16.5
3	295/80R22.5	9.00	18	154/149M	-	3750	850	3250	850	1044	298	16.5
4	315/60R22.5	9.75	16	152/148L	-	3550	900	3150	900	950	313	14.5
5	315/60R22.5	9.75	18	154/150L	152/148M	3750	900	3350	900	950	313	14.5
6	315/70R22.5	9.00	16	154/150L	152/148M	3750	900	3350	900	1014	312	15.5
7	315/70R22.5	9.00	18	156/150L	154/150M	4000	900	3350	900	1014	312	15.5
8	315/80R22.5	9.00	20	156/150L	154/150M	4000	850	3350	850	1076	312	15.5
9	315/80R22.5	9.00	22	158/150L	154/150M	4250	900	3350	900	1076	312	15.5
10	385/55R22.5	12.25	18	158L	-	4250	850	-	-	996	386	13.5
11	385/55R22.5	12.25	20	160K	158L	4500	900	-	-	996	386	13.5
12	385/65R22.5	11.75	20	160K	158L	4500	900	-	-	1072	389	15.5
13	385/65R22.5	11.75	24	164K	158L	5000	900	-	-	1072	389	15.5

Remark : The above technical data are for reference only .

REGIONAL S12







Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort

- Optimized the footprint for long and even wear.
- Construction optimized for long life.
- Specially reinforced sidewall design.


No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	11R22.5	8.25	14	144/142M	-	2800	720	2650	720	1054	279	14.5
2	11R22.5	8.25	16	146/143M	-	3000	830	2725	830	1054	279	14.5
3	11R24.5	8.25	14	146/143M	-	3000	720	2725	720	1104	279	14.5
4	11R24.5	8.25	16	149/146M	-	3250	830	3000	830	1104	279	14.5
5	285/75R24.5	8.25	14	144/141M	-	2800	760	2575	760	1050	283	14.5
6	285/75R24.5	8.25	16	147/144M	-	3075	830	2800	830	1050	283	14.5
7	295/75R22.5	9.00	14	144/141M	-	2800	760	2575	760	1014	298	14.5
8	295/75R22.5	9.00	16	146/143M	-	3000	830	2725	830	1014	298	14.5

Remark : The above technical data are for reference only .

REGIONAL S15









Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort


- Long life.
- Retreadability.
- Low eccentric wear.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	215/75R17.5	6.00	14	126/124M	-	1700	700	1600	700	767	211	12.5
2	215/75R17.5	6.00	16	135/133J	-	2180	850	2060	850	767	211	12.5
3	225/75R17.5	6.75	12	126/125M	-	1700	675	1650	675	783	226	12.5
4	225/75R17.5	6.75	14	129/127M	-	1850	725	1750	725	783	226	12.5
5	235/75R17.5	6.75	14	132/130M	-	2000	775	1900	775	797	233	12.5
6	235/75R17.5	6.75	16	141/140J	-	2575	850	2500	850	797	233	12.5
7	235/75R17.5	6.75	18	143/141J	-	2725	875	2575	875	797	233	12.5
8	245/70R17.5	7.50	14	134/132M	-	2120	775	2000	775	789	248	12.5
9	245/70R17.5	7.50	16	136/134M	-	2240	850	2120	850	789	248	12.5
10	245/70R17.5	7.50	18	143/141J	-	2725	875	2575	875	789	248	12.5
11	245/70R19.5	7.50	12	129/127M	-	1850	660	1750	660	839	248	12.5
12	245/70R19.5	7.50	14	133/131M	-	2060	760	1950	760	839	248	12.5
13	245/70R19.5	7.50	14	133/131M	-	2060	750	1950	750	839	248	12.5
14	245/70R19.5	7.50	16	136/134M	-	2240	825	2120	825	839	248	12.5
15	265/70R19.5	7.50	14	136/134M	-	2240	725	2120	725	867	262	13.5
16	265/70R19.5	7.50	16	140/138M	-	2500	775	2360	775	867	262	13.5
17	265/70R19.5	7.50	18	143/141J	-	2725	850	2575	850	867	262	13.5
18	285/70R19.5	8.25	18	146/144M	-	3000	900	2800	900	895	283	13.5
19	285/70R19.5	8.25	18	150/148J	-	3350	900	3150	900	895	283	13.5
20	305/70R19.5	9.00 (8.25)	18	148/145M	-	3150	850	2900	850	923	305	13.5

Remark : The above technical data are for reference only .

REGIONAL S16









- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- New technology for reducing tire weight.
- Low eccentric wear.
- Low fuel consumption.
- Good handling.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	385/65R22.5	11.75	20	160J	-	4500	900	-	-	1072	389	13.0
2	385/65R22.5	11.75	20	160K	158L	4500	900	-	-	1072	389	13.0
3	385/65R22.5	11.75	24	164J	-	5000	900	-	-	1072	389	13.0

Remark : The above technical data are for reference only .

REGIONAL S17







- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort


- Optimize pattern straight groove design to improve the product's handling and traction ability.
- Special patterned bottom design yeffectively protects tire from being damaged by foreign matter.
- HAT technology reduces the heat generation and improves the service life.
- Optimize the product profile, reduce the weight of tire while ensuring its performance.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	295/80R22.5	9.00	18	152/149L	-	3550	900	3250	900	1044	298	14

Remark : The above technical data are for reference only .



REGIONAL D11





Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort


- Optimization of the shoulder block,improving resistance to shoulder damage.
- Lasting grip and stability ,with M+S and 3PMSF marking.
- High wear resistance.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	295/60R22.5	9.00	16	150/147L	-	3350	900	3075	900	926	292	18.0
2	295/80R22.5	9.00	16	152/148M	-	3550	850	3150	850	1044	298	20.5
3	315/60R22.5	9.75	16	152/148L	-	3550	900	3150	900	950	313	19.5
4	315/70R22.5	9.00	16	154/150L	152/148M	3750	900	3350	900	1014	312	20.0
5	315/70R22.5	9.00	18	156/150L	154/150M	4000	900	3350	900	1014	312	20.0
6	315/80R22.5	9.00	18	154/150M	-	3750	825	3350	825	1076	312	22.0
7	315/80R22.5	9.00	20	156/150L	154/150M	4000	850	3350	850	1076	312	22.0

Remark : The above technical data are for reference only .



REGIONAL D12





Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort


- Typical block pattern design suitable for drive axle of trucks.
- Good braking and grip on the road.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	215/75R17.5	6.00	14	126/124M	-	1700	700	1600	700	767	211	14.0
2	225/75R17.5	6.75	12	126/125M	-	1700	675	1650	675	783	226	14.5
3	225/75R17.5	6.75	14	129/127M	-	1850	725	1750	725	783	226	14.5
4	235/75R17.5	6.75	14	132/130M	-	2000	775	1900	775	797	233	14.5
5	245/70R17.5	7.50	14	134/132M	-	2120	775	2000	775	789	248	14.5
6	245/70R17.5	7.50	16	136/134M	-	2240	850	2120	850	789	248	14.5
7	245/70R19.5	7.50	14	133/131M	-	2060	750	1950	750	839	248	14.5
8	245/70R19.5	7.50	16	136/134M	-	2240	825	2120	825	839	248	14.5
9	265/70R19.5	7.50	14	136/134M	-	2240	725	2120	725	867	262	15.5
10	265/70R19.5	7.50	16	140/138M	-	2500	775	2360	775	867	262	15.5
11	285/70R19.5	8.25	18	146/144M	-	3000	900	2800	900	895	283	16.0
12	305/70R19.5	9.00 (8.25)	18	148/145M	-	3150	850	2900	850	923	305	16.0

Remark : The above technical data are for reference only .



REGIONAL D15





Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort


- Tread design helps deliver all-season traction and reduction of uneven wear.
- Construction optimized for fuel economy and long life.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	11R22.5	8.25	14	144/142L	-	2800	720	2650	720	1059	279	20.5
2	11R22.5	8.25	16	146/143L	-	3000	830	2725	830	1059	279	20.5
3	11R24.5	8.25	14	146/143L	-	3000	720	2725	720	1110	279	20.5
4	11R24.5	8.25	16	149/146L	-	3250	830	3000	830	1110	279	20.5
5	285/75R24.5	8.25	14	144/141M	-	2800	760	2575	760	1056	283	20.5
6	285/75R24.5	8.25	16	147/144M	-	3075	830	2800	830	1056	283	20.5
7	295/75R22.5	9.00	14	144/141M	-	2800	760	2575	760	1020	298	20.5
8	295/75R22.5	9.00	16	146/143M	-	3000	830	2725	830	1020	298	20.5


Remark : The above technical data are for reference only .



REGIONAL D16









Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort

- Optimize internal contour design to improve duraility significantly.
- Opean shoulder design and tiny crosswise grooves to enhance good heat dissipation capacity .
- Multiple tiny sipes to provide exellent heat dissipation and reduces rolling noise.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	295/80R22.5	9.00	16	152/148M	-	3550	850	3150	850	1044	298	17.5

Remark : The above technical data are for reference only .



REGIONAL D17





- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort


- Optimize the pattern block proportion, improve the wetland grip, and prevent eccentric wear.
- Optimize the shoulder design to improve its anti-damage ability and prolong the service life.
- HAT technology reduces the heat generation and improves the service life.
- Optimize the product profile, reduce the weight of tire while ensuring its performance.


No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	295/80R22.5	9.00	18	152/149L	-	3550	900	3250	900	1044	298	17

Remark : The above technical data are for reference only .



REGIONAL T11







- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- Strong , solid shoulders give excellent stability and handling.
- Special groove design for minimized stone retention and advanced stone rejection.
- New tread compound for optimized resistance.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	205/65R17.5	6.00	16	129/127J	132/132G	1850	900	1750	900	711	204	12.5
2	215/75R17.5	6.00	16	135/133J	-	2180	850	2060	850	767	211	12.5
3	235/75R17.5	6.75	16	141/140J	-	2575	850	2500	850	797	233	12.5
4	235/75R17.5	6.75	18	143/141J	-	2725	875	2575	875	797	233	12.5
5	245/70R17.5	7.50	18	143/141J	-	2725	875	2575	875	789	248	12.5

Remark : The above technical data are for reference only .



REGIONAL T12





Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort


- Tough tread compounds fight scrub wear,yet suitable for long mileage.
- Wide,continuous shoulder ribs fight turning side forces and resist tearing.
- 5-rib design provides vehicle stability and comfort.
- Specially reinforced sidewall design.


No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	11R22.5	8.25	14	144/142M	-	2800	720	2650	720	1050	279	10.75
2	11R22.5	8.25	16	146/143M	-	3000	830	2725	830	1050	279	10.75
3	11R24.5	8.25	14	146/143M	-	3000	720	2725	720	1100	279	10.75
4	11R24.5	8.25	16	149/146M	-	3250	830	3000	830	1100	279	10.75
5	255/70R22.5	7.50	16	140/137M	-	2500	830	2300	830	930	255	10.75
6	285/75R24.5	8.25	14	144/141M	-	2800	760	2575	760	1050	283	10.75
7	285/75R24.5	8.25	16	147/144M	-	3075	830	2800	830	1050	283	10.75
8	295/75R22.5	9.00	14	144/141M	-	2800	760	2575	760	1014	298	10.75
9	295/75R22.5	9.00	16	146/143M	-	3000	830	2725	830	1014	298	10.75

Remark : The above technical data are for reference only .



REGIONAL T15







Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort

- Wear-resistance compound reduces shifting to prevent ueven wear
- Multiple tiny sipes to provide exellent heat dissipation and wet grip.
- Four zigzag mian pattern grooves provides excellent traction and breaking performance.


No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	385/55R22.5	12.25	18	158L	-	4250	850	-	-	996	386	16.5
2	385/55R22.5	12.25	20	160J	158L	4500	900	-	-	996	386	16.5
3	385/65R22.5	11.75	20	160J	158L	4500	900	-	-	1072	389	16.5
4	385/65R22.5	11.75	24	164J	-	5000	900	-	-	1072	389	16.5
5	445/65R22.5	14.00	20	169J	-	5800	900	-	-	1150	454	18.0

Remark : The above technical data are for reference only .



REGIONAL G11







Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort


- Significant groove angles to help release stones and reduces damages from stone drilling.
- Zig-zag sipes help promote excellent traction throughout life of the tire.


No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	215/75R17.5	6.00	14	126/124L/M	-	1700	700	1600	700	767	211	12.5
2	215/75R17.5	6.00	16	135/133J	-	2180	850	2060	850	767	211	12.5
3	215/75R17.5	6.00	16	135/133J/L	-	2180	850	2060	850	767	211	12.5

Remark : The above technical data are for reference only .



REGIONAL G12







Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort

- Typical zigzag groove design for multi-road use.
- Outstanding resistance to high scrub application from large solid shoulder.


No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	425/65R22.5	12.25	18	162K	-	4750	760	-	-	1124	422	17.5
2	425/65R22.5	12.25	20	165J	-	5150	825	-	-	1124	430	17.5
3	425/65R22.5	12.25	20	165J	-	5150	830	-	-	1124	422	17.5

Remark : The above technical data are for reference only .

REGIONAL G15









Service - life

Maneuverability

Fuel - efficiency

Security

All - weather

Comfort

- Massive shoulders and application specific compound help resist scrub and abrasion ,extending tread life.
- Zogzag groove for true all - position use.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single - KG)	MaxPressure (Single - KPa)	MaxLoad (Dual - KG)	MaxPressure (Dual - KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	385/65R22.5	11.75	18	158K	-	4250	830	-	-	1072	389	16.5
2	385/65R22.5	11.75	18	158K	-	4250	850	-	-	1072	389	16.5
3	385/65R22.5	11.75	20	160J	-	4500	900	-	-	1072	389	16.5
4	385/65R22.5	11.75	24	164J	-	5000	900	-	-	1072	389	16.5

Remark : The above technical data are for reference only .



ON/OFF ROAD

MIXED D11

- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- Thick sidewall design protect against sidewall impacts and bruises.
- Stone rejection design protect groove bottom from stone puncture.
- Lasting grip and stability ,with M+S and 3PMSF marking.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	13R22.5	9.75	18	156/150K	-	4000	875	3350	875	1124	320	21.0
2	315/80R22.5	9.00	20	156/150K	-	4000	850	3350	850	1076	312	21.0

Remark : The above technical data are for reference only .



MIXED D12





Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort

- Professional formula and sidewall thickening design, improve the performance of puncture resistance.
- Special pattern groove design improves the product's ability of holding the wetland.
- HAT technology reduces the heat generation and improves the service life.
- Optimize the product profile, reduce the weight of tire while ensuring its performance.


No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	295/80R22.5	9.00	18	154/149K	-	3750	850	3250	850	1044	298	18.5

Remark : The above technical data are for reference only .



MIXED T11







Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort


- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	385/55R22.5	12.25	18	158L	-	4250	850	-	-	996	386	16.5
2	385/55R22.5	12.25	20	160J	-	4500	900	-	-	996	386	16.5
3	385/65R22.5	11.75	18	158K	-	4250	850	-	-	1072	389	16.5
4	385/65R22.5	11.75	20	160K	-	4500	900	-	-	1072	389	16.5
5	385/65R22.5	11.75	24	164J	-	5000	900	-	-	1072	389	16.5
6	425/65R22.5	12.25	20	165J	-	5150	825	-	-	1124	430	17.5
7	425/65R22.5	12.25	20	165K	-	5150	830	-	-	1124	422	17.5
8	445/65R22.5	13.00	20	168K	-	5600	830	-	-	1150	444	18.0
9	445/65R22.5	13.00	20	169J/K	-	5800	900	-	-	1150	454	18.0

Remark : The above technical data are for reference only .

MIXED G10







Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort

- The design of high saturation and large block provides excellent cutting resistance and prick performance, bringing long service life.
- Hybrid pattern design provides good traction.
- Opean-shoulder designed can effectively protect aginst stone embed and avoid early damage.
- Excellent pattern proportion design to ensure the smooth running of the tire.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	16.00R20	11.25	22	174/171G	168/165L	6700	760	6150	760	1312	460	20
2	16.00R20	11.25	22	174/171E	-	6700	760	6150	760	1312	460	20


Remark : The above technical data are for reference only .

MIXED G11









Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort

- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.


No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	11R22.5	8.25	14	144/142K	-	2800	720	2650	720	1054	279	15.0
2	11R22.5	8.25	16	146/143K		3000	830	2725	830	1054	279	15.0
3	11R22.5	8.25	16	148/145K		3150	850	2900	850	1050	279	16.5
4	11R22.5	8.25	16	148/145K	-	3150	850	2900	850	1054	279	15.5
5	11R24.5	8.25	16	149/146K	-	3250	830	3000	830	1104	279	15.5
6	12.00R20	8.50	18	154/151K	-	3750	830	3450	830	1125	315	17.0
7	12.00R24	8.50	18	156/153K	-	4000	775	3650	775	1226	313	17.0
8	12.00R24	8.50	20	160/156K	-	4500	850	4000	850	1226	313	17.0
9	12R22.5	9.00	16	150/147K		3350	830	3075	830	1085	300	17.0
10	12R22.5	9.00	16	152/148K	-	3550	850	3150	850	1084	300	17.0
11	12R22.5	9.00	18	152/149K	-	3550	930	3250	930	1085	300	17.0
12	255/70R22.5	7.50	16	140/137M	-	2500	830	2300	830	930	255	12.7
13	315/80R22.5	9.00	18	154/150M	-	3750	825	3350	825	1076	312	17.0
14	315/80R22.5	9.00	20	156/150L	-	4000	850	3350	850	1076	312	17.0
15	315/80R22.5	9.00	20	157/154K	-	4125	900	3750	900	1076	312	17.0

Remark : The above technical data are for reference only .

MIXED G12









Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort

- Thick sidewall design protect against sidewall impacts and bruises.
- Stone rejection design protect groove bottom from stone puncture.
- Lasting grip and stability ,with M+S and 3PMSF marking.


No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	385/65R22.5	11.75	18	158L	-	4250	850	-	-	1072	389	18.0
2	385/65R22.5	11.75	20	160K	158L	4500	900	-	-	1072	389	18.0
3	385/65R22.5	11.75	24	164J	-	5000	900	-	-	1072	389	18.0
4	425/65R22.5	12.25	20	165K	-	5150	825	-	-	1124	430	18.5

Remark : The above technical data are for reference only .

MIXED G15









Service-life
Maneuverability
Fuel-efficiency
Security
All-weather
Comfort


- Thick sidewall design protect against sidewall impacts and bruises.
- Stone rejection design protect groove bottom from stone puncture.
- Lasting grip and stability ,with M+S and 3PMSF marking.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	13R22.5	9.75	18	156/150K	-	4000	875	3350	875	1124	320	19.0
2	13R22.5	9.75	20	158/156K	-	4250	900	4000	900	1124	320	19.0
3	295/80R22.5	9.00	16	152/148K	-	3550	850	3150	850	1044	298	19.0
4	315/80R22.5	9.00	20	156/150K	-	4000	850	3350	850	1076	312	19.0
5	315/80R22.5	9.00	22	158/150K	-	4250	900	3350	900	1076	312	19.0
6	425/65R22.5	12.25	20	165K	-	5150	825	-	-	1124	430	18.5
7	445/65R22.5	13.00	20	169J/K	-	5800	900	-	-	1150	454	18.5

Remark : The above technical data are for reference only .



MIXED G16





- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- Professional formula and sidewall thickening design, improve the performance of puncture resistance.
- Special patterned bottom design yeffectively protects tire from being damaged by foreign matter.
- HAT technology reduces the heat generation and improves the service life.
- Optimize the product profile, reduce the weight of tire while ensuring its performance.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	295/80R22.5	9.00	18	154/149K	——	3750	850	3250	850	1044	298	18.5

Remark : The above technical data are for reference only .

MINE



MINE D11





- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- Deep and rigid block design for good traction.
- Stone rejectors protect the casing in base of the tread groove.
- New tread compound for resistance to cuts, chips and tearing.
- Special sidewall design for logging use.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	11R22.5	8.25	16	146/143K	-	3000	830	2725	830	1065	279	23.0
2	11R24.5	8.25	16	149/146G	-	3250	830	3000	830	1116	279	25.0

Remark : The above technical data are for reference only .

MINE D12







- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- Designed for desert conditions, high temperature resistant tread formula is more suitable for high temperature work.
- The combination of vertical and horizontal grooves provides excellent grip performance and sand mobility.
- Opean-shoulder designed can effectively protect aginst stone embed and avoid early damage.
- Double - layer pattern design enhance the buoyancy of the tire.


No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	24R20.5	18.00	16	176F	-	7100	600	-	-	1370	600	22.0


Remark : The above technical data are for reference only .

URBAN

URBAN G11









- Service-life
- Maneuverability
- Fuel-efficiency
- Security
- All-weather
- Comfort

- Enhanced sidewall ensures high safety.
- Tire strength is increased by 35%,with application of ST steel cord.
- Tire bead cracking is prevented,with application fiber layer in bead area.

No.	Size	Rim	Ply Rating	LI/SS	Second LI/SS	MaxLoad (Single-KG)	MaxPressure (Single-KPa)	MaxLoad (Dual-KG)	MaxPressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
1	275/70R22.5	8.25	16	148/145J	-	3150	900	2900	900	958	276	21.0

Remark : The above technical data are for reference only .

No.	Size	HT Pattern	Rim	Ply Rating	LI/SS	Second LI/SS	Max. Load (Single-KG)	Max. Pressure (Single-KPa)	Max. Load (Dual-KG)	Max. Pressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	DOT	M+S	3PMSF	EU-RR (Level)	EU-WG (Level)	EU-N (Level)	EU-N (dB)	HL
1	11R22.5	HIGHWAY D12	8.25	14	144/142L	-	2800	720	2650	720	1065	279	22.0	YES	-	-	-	-	-	-	-
2	11R22.5	HIGHWAY D12	8.25	16	146/143L	-	3000	830	2725	830	1065	279	22.0	YES	-	-	-	-	-	-	-
3	11R22.5	HIGHWAY D16	8.25	14	144/142M	-	2800	720	2650	720	1065	279	22.0	YES	-	-	-	-	-	-	-
4	11R22.5	HIGHWAY D16	8.25	16	146/143M	-	3000	830	2725	830	1065	279	22.0	YES	-	-	-	-	-	-	-
5	11R22.5	HIGHWAY S12	8.25	14	144/142M	-	2800	720	2650	720	1054	279	14.5	YES	-	-	-	-	-	-	-
6	11R22.5	HIGHWAY S12	8.25	16	146/143M	-	3000	830	2725	830	1054	279	14.5	YES	-	-	-	-	-	-	-
7	11R22.5	MINE D11	8.25	16	146/143K	-	3000	830	2725	830	1065	279	23.0	YES	-	-	-	-	-	-	-
8	11R22.5	MIXED G11	8.25	14	144/142K	-	2800	720	2650	720	1054	279	15.0	YES	-	-	-	-	-	-	-
9	11R22.5	MIXED G11	8.25	16	146/143K		3000	830	2725	830	1054	279	15.0	YES	-	-	-	-	-	-	-
10	11R22.5	MIXED G11	8.25	16	148/145K	-	3150	850	2900	850	1050	279	16.5	YES	-	YES	YES	D	B	2	73 -
11	11R22.5	MIXED G11	8.25	16	148/145K		3150	850	2900	850	1054	279	15.0	YES	-	-	-	-	-	-	-
12	11R22.5	REGIONAL D15	8.25	14	144/142L	-	2800	720	2650	720	1059	279	20.5	YES	-	-	-	-	-	-	-
13	11R22.5	REGIONAL D15	8.25	16	146/143L	-	3000	830	2725	830	1059	279	20.5	YES	-	-	-	-	-	-	-
14	11R22.5	REGIONAL S12	8.25	14	144/142M	-	2800	720	2650	720	1054	279	14.5	YES	-	-	-	-	-	-	-
15	11R22.5	REGIONAL S12	8.25	16	146/143M	-	3000	830	2725	830	1054	279	14.5	YES	-	-	-	-	-	-	-
16	11R22.5	REGIONAL T12	8.25	14	144/142M	-	2800	720	2650	720	1050	279	10.8	YES	-	-	-	-	-	-	-
17	11R22.5	REGIONAL T12	8.25	16	146/143M	-	3000	830	2725	830	1050	279	10.8	YES	-	-	-	-	-	-	-
18	11R24.5	HIGHWAY D12	8.25	14	146/143L	-	3000	720	2725	720	1116	279	22.0	YES	-	-	-	-	-	-	-
19	11R24.5	HIGHWAY D12	8.25	16	149/146L	-	3250	830	3000	830	1116	279	22.0	YES	-	-	-	-	-	-	-
20	11R24.5	HIGHWAY D16	8.25	14	146/143M	-	3000	720	2725	720	1116	279	22.0	YES	-	-	-	-	-	-	-
21	11R24.5	HIGHWAY D16	8.25	16	149/146M	-	3250	830	3000	830	1116	279	22.0	YES	-	-	-	-	-	-	-
22	11R24.5	HIGHWAY S12	8.25	14	146/143M	-	3000	720	2725	720	1104	279	14.5	YES	-	-	-	-	-	-	-
23	11R24.5	HIGHWAY S12	8.25	16	149/146M	-	3250	830	3000	830	1104	279	14.5	YES	-	-	-	-	-	-	-
24	11R24.5	MINE D11	8.25	16	149/146G	-	3250	830	3000	830	1116	279	25.0	YES	-	-	-	-	-	-	-
25	11R24.5	MIXED G11	8.25	16	149/146K	-	3250	830	3000	830	1104	279	15.5	YES	-	-	-	-	-	-	-
26	11R24.5	REGIONAL D15	8.25	14	146/143L	-	3000	720	2725	720	1110	279	20.5	YES	-	-	-	-	-	-	-
27	11R24.5	REGIONAL D15	8.25	16	149/146L	-	3250	830	3000	830	1110	279	20.5	YES	-	-	-	-	-	-	-
28	11R24.5	REGIONAL S12	8.25	14	146/143M	-	3000	720	2725	720	1104	279	14.5	YES	-	-	-	-	-	-	-
29	11R24.5	REGIONAL S12	8.25	16	149/146M	-	3250	830	3000	830	1104	279	14.5	YES	-	-	-	-	-	-	-
30	11R24.5	REGIONAL T12	8.25	14	146/143M	-	3000	720	2725	720	1100	279	10.8	YES	-	-	-	-	-	-	-
31	11R24.5	REGIONAL T12	8.25	16	149/146M	-	3250	830	3000	830	1100	279	10.8	YES	-	-	-	-	-	-	-
32	13R22.5	MIXED D11	9.75	18	156/150K	-	4000	875	3350	875	1124	320	21.0	YES	-	YES	YES	D	B	2	73 -
33	13R22.5	MIXED G15	9.75	18	156/150K	-	4000	875	3350	875	1124	320	19.0	YES	YES	YES	YES	D	B	2	73 -
34	13R22.5	MIXED G15	9.75	20	158/156K	-	4250	900	4000	900	1124	320	19.0	YES	YES	YES	YES	D	B	2	73 -
35	16.00R20	MIXED G10	11.25	22	174/171E	-	6700	760	6150	760	1312	460	20.0	YES	-	-	-	-	-	-	-
36	16.00R20	MIXED G10	11.25	22	174/171G	168/165L	6700	760	6150	760	1312	460	20.0	YES	-	-	-	-	-	-	-
37	205/65R17.5	REGIONAL T11	6.00	16	129/127J	132/132G	1850	900	1750	900	711	204	12.5	YES	-	YES	-	D	B	2	72 -
38	215/75R17.5	REGIONAL D12	6.00	14	126/124M	-	1700	700	1600	700	767	211	14.0	YES	-	YES	YES	D	C	2	73 -
39	215/75R17.5	REGIONAL G11	6.00	14	126/124L/M	-	1700	700	1600	700	767	211	12.5	YES	-	YES	YES	E	B	2	72 -
40	215/75R17.5	REGIONAL G11	6.00	16	135/133J	-	2180	850	2060	850	767	211	12.5	YES	-	-	-	-	-	-	-
41	215/75R17.5	REGIONAL G11	6.00	16	135/133J/L	-	2180	850	2060	850	767	211	12.5	YES	-	YES	YES	E	B	2	72 -
42	215/75R17.5	REGIONAL S15	6.00	14	126/124M	-	1700	700	1600	700	767	211	12.5	YES	YES	YES	YES	D	B	2	73 -
43	215/75R17.5	REGIONAL S15	6.00	16	135/133J	-	2180	850	2060	850	767	211	12.5	YES	YES	YES	YES	D	B	2	73 -
44	215/75R17.5	REGIONAL T11	6.00	16	135/133J	-	2180	850	2060	850	767	211	12.5	YES	YES	YES	-	D	B	2	72 -
45	225/75R17.5	REGIONAL D12	6.75	12	126/125M	-	1700	675	1650	675	783	226	14.5	YES	YES	YES	YES	D	C	2	73 -
46	225/75R17.5	REGIONAL D12	6.75	14	129/127M	-	1850	725	1750	725	783	226	14.5	YES	YES	YES	YES	D	C	2	73 -
47	225/75R17.5	REGIONAL S15	6.75	12	126/125M	-	1700	675	1650	675	783	226	12.5	YES	-	YES	YES	D	B	2	73 -
48	225/75R17.5	REGIONAL S15	6.75	14	129/127M	-	1850	725	1750	725	783	226	12.5	YES	-	YES	YES	D	B	2	73 -
49	235/75R17.5	REGIONAL D12	6.75	14	132/130M	-	2000	775	1900	775	797	233	14.5	YES	YES	YES	YES	D	C	2	73 -
50	235/75R17.5	REGIONAL S15	6.75	14	132/130M	-	2000	775	1900	775	797	233	12.5	YES	-	YES	YES	D	B	2	73 -
51	235/75R17.5	REGIONAL S15	6.75	16	141/140J	-	2575	850	2500	850	797	233	12.5	YES	-	YES	YES	D	B	2	73 -
52	235/75R17.5	REGIONAL S15	6.75	18	143/141J	-	2725	875	2575	875	797	233	12.5	YES	-	YES	YES	D	B	2	73 -
53	235/75R17.5	REGIONAL T11	6.75	16	141/140J	-	2575	850	2500	850	797	233	12.5	YES	YES	YES	-	D	B	2	72 -
54	235/75R17.5	REGIONAL T11	6.75	18	143/141J	-	2725	875	2575	875	797	233	12.5	YES	YES	YES	-	D	B	2	72 -
55	245/70R17.5	REGIONAL D12	7.50	14	134/132M	-	2120	775	2000	775	789	248	14.5	YES	YES	YES	YES	D	C	2	73 -
56	245/70R17.5	REGIONAL D12	7.50	16	136/134M	-	2240	850	2120	850	789	248	14.5	YES	YES	YES	YES	D	C	2	73 -
57	245/70R17.5	REGIONAL S15	7.50	14	134/132M	-	2120	775	2000	775	789	248	12.5	YES	-	YES	YES	D	B	2	73 -
58	245/70R17.5	REGIONAL S15	7.50	16	136/134M	-	2240	850	2120	850	789	248	12.5	YES	-	YES	YES	D	B	2	73 -
59	245/70R17.5	REGIONAL S15	7.50	18	143/141J	-	2725	875	2575	875	789	248	12.5	YES	-	YES	YES	D	B	2	73 -
60	245/70R17.5	REGIONAL T11	7.50	18	143/141J	-	2725	875	2575	875	789	248	12.5	YES	YES	YES	-	D	B	2	72 -
61	245/70R19.5	REGIONAL D12	7.50	14	133/131M	-	2060	750	1950	750	839	248	14.5	YES	-	YES	YES	D	C	2	73 -
62	245/70R19.5	REGIONAL D12	7.50	16	136/134M	-	2240	825	2120	825	839	248	14.5	YES	-	YES	YES	D	C	2	73 -
63	245/70R19.5	REGIONAL S15	7.50	12	129/127M	-	1850	660	1750	660	839	248	12.5	YES	-	YES	YES	D	B	2	73 -
64	245/70R19.5	REGIONAL S15	7.50	14	133/131M	-	2060	760	1950	760	839	248	12.5	YES	-	YES	YES	D	B	2	73 -
65	245/70R19.5	REGIONAL S15	7.50	14	133/131M	-	2060	750	1950	750	839	248	12.5	YES	-	YES	YES	D	B	2	73 -
66	245/70R19.5	REGIONAL S15	7.50	16	136/134M	-	2240	825	2120	825	839	248	12.5	YES	-	YES	YES	D	B	2	73 -
67	24R20.5	MINE D12	18.00	☆/16	176F	-	7100	600	-	-	1370	600	22.0	YES	-	-	-	-	-	-	-
68	255/70R22.5	MIXED G11	7.50	16	140/137M	-	2500	830	2300	830	930	255	12.7	YES	-	-	-	-	-	-	-
69	255/70R22.5	REGIONAL T12	7.50	16	140/137M	-	2500	830	2300	830	930	255	10.8	YES	-	-	-	-	-	-	-
70	265/70R19.5	REGIONAL D12	7.50	14	136/134M	-	2240	725	2120	725	867	262	15.5	YES	YES	YES	YES	D	C	2	73 -
71	265/70R19.5	REGIONAL D12	7.50	16	140/138M	-	2500	775	2360	775	867	262	15.5	YES	YES	YES	YES	D	C	2	73 -
72	265/70R19.5	REGIONAL S15	7.50	14	136/134M	-	2240	725	2120	725	867	262	13.5	YES	YES	YES	YES	D	B	2	73 -
73	265/70R19.5	REGIONAL S15	7.50	16	140/138M	-	2500	775	2360	775	867	262	13.5	YES	YES	YES	YES	D	B	2	73 -
74	265/70R19.5	REGIONAL S15	7.50	18	143/141J	-	2725	850	2575	850	867	262	13.5	YES	YES	YES	YES	D	B	2	73 -
75	275/70R22.5	URBAN G11	8.25	16	148/145J	-	3150	900	2900	900	958	276	21.0	YES	YES	-	-	D	B	2	73 -
76	285/70R19.5	REGIONAL D12	8.25	18	146/144M	-	3000	900	2800	900	895	283	16.0	YES	-	YES	YES	D	C	2	73 -
77	285/70R19.5	REGIONAL S15	8.25	18	146/144M	-	3000	900	2800	900	895	283	13.5	YES	YES	YES	YES	D	B	2	73 -
78	285/70R19.5	REGIONAL S15	8.25	18	150/148J	-	3350	900	3150	900	895	283	13.5	YES	YES	YES	YES	D	B	2	73 -
79	285/75R24.5	HIGHWAY D12	8.25	14	144/141L	-	2800	760	2575	760	1066	283	22.0	YES	-	-	-	-	-	-	-
80	285/75R24.5	HIGHWAY D12	8.25	16	147/144L	-	3075	830	2800	830	1066	283	22.0	YES	-	-	-	-	-	-	-

No.	Size	HT Pattern	Rim	Ply Rating	LI/SS	Second LI/SS	Max. Load (Single-KG)	Max. Pressure (Single-KPa)	Max. Load (Dual-KG)	Max. Pressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	DOT	M+S	3PMSF	EU-RR (Level)	EU-WG (Level)	EU-N (Level)	EU-N (dB)	HL
81	285/75R24.5	HIGHWAY D16	8.25	14	144/141M	-	2800	760	2575	760	1066	283	22.0	YES	-	-	-	-	-	-	-
82	285/75R24.5	HIGHWAY D16	8.25	16	147/144M	-	3075	830	2800	830	1066	283	22.0	YES	-	-	-	-	-	-	-
83	285/75R24.5	HIGHWAY S12	8.25	14	144/141M	-	2800	760	2575	760	1050	283	14.5	YES	-	-	-	-	-	-	-
84	285/75R24.5	HIGHWAY S12	8.25	16	147/144M	-	3075	830	2800	830	1050	283	14.5	YES	-	-	-	-	-	-	-
85	285/75R24.5	REGIONAL D15	8.25	14	144/141M	-	2800	760	2575	760	1056	283	20.5	YES	-	-	-	-	-	-	-
86	285/75R24.5	REGIONAL D15	8.25	16	147/144M	-	3075	830	2800	830	1056	283	20.5	YES	-	-	-	-	-	-	-
87	285/75R24.5	REGIONAL S12	8.25	14	144/141M	-	2800	760	2575	760	1050	283	14.5	YES	-	-	-	-	-	-	-
88	285/75R24.5	REGIONAL S12	8.25	16	147/144M	-	3075	830	2800	830	1050	283	14.5	YES	-	-	-	-	-	-	-
89	285/75R24.5	REGIONAL T12	8.25	14	144/141M	-	2800	760	2575	760	1050	283	10.8	YES	-	-	-	-	-	-	-
90	285/75R24.5	REGIONAL T12	8.25	16	147/144M	-	3075	830	2800	830	1050	283	10.8	YES	-	-	-	-	-	-	-
91	295/60R22.5	HIGHWAY D11	9.00	16	150/147L	-	3350	900	3075	900	926	292	16.0	YES	YES	YES	YES	D	C	2	75 -
92	295/60R22.5	HIGHWAY S11	9.00	16	150/147L	-	3350	900	3075	900	926	292	13.0	YES	YES	YES	YES	D	C	2	73 -
93	295/60R22.5	REGIONAL D11	9.00	16	150/147L	-	3350	900	3075	900	926	292	18.0	YES	YES	YES	YES	E	B	2	75 -
94	295/60R22.5	REGIONAL S11	9.00	16	150/147L	-	3350	900	3075	900	926	292	14.0	YES	YES	YES	YES	C	C	2	73 -
95	295/75R22.5	HIGHWAY D12	9.00	14	144/141L	-	2800	760	2575	760	1026	298	22.0	YES	-	-	-	-	-	-	-
96	295/75R22.5	HIGHWAY D12	9.00	16	146/143L	-	3000	830	2725	830	1026	298	22.0	YES	-	-	-	-	-	-	-
97	295/75R22.5	HIGHWAY D16	9.00	14	144/141M	-	2800	760	2575	760	1026	298	22.0	YES	-	-	-	-	-	-	-
98	295/75R22.5	HIGHWAY D16	9.00	16	146/143M	-	3000	830	2725	830	1026	298	22.0	YES	-	-	-	-	-	-	-
99	295/75R22.5	HIGHWAY S12	9.00	14	144/141M	-	2800	760	2575	760	1014	298	14.5	YES	-	-	-	-	-	-	-
100	295/75R22.5	HIGHWAY S12	9.00	16	146/143M	-	3000	830	2725	830	1014	298	14.5	YES	-	-	-	-	-	-	-
101	295/75R22.5	REGIONAL D15	9.00	14	144/141M	-	2800	760	2575	760	1020	298	20.5	YES	-	-	-	-	-	-	-
102	295/75R22.5	REGIONAL D15	9.00	16	146/143M	-	3000	830	2725	830	1020	298	20.5	YES	-	-	-	-	-	-	-
103	295/75R22.5	REGIONAL S12	9.00	14	144/141M	-	2800	760	2575	760	1014	298	14.5	YES	-	-	-	-	-	-	-
104	295/75R22.5	REGIONAL S12	9.00	16	146/143M	-	3000	830	2725	830	1014	298	14.5	YES	-	-	-	-	-	-	-
105	295/75R22.5	REGIONAL T12	9.00	14	144/141M	-	2800	760	2575	760	1014	298	10.8	YES	-	-	-	-	-	-	-
106	295/75R22.5	REGIONAL T12	9.00	16	146/143M	-	3000	830	2725	830	1014	298	10.8	YES	-	-	-	-	-	-	-
107	295/80R22.5	HIGHWAY D11	9.00	16	152/148M	-	3550	850	3150	850	1044	298	16.0	YES	YES	YES	YES	C	C	2	75 -
108	295/80R22.5	HIGHWAY S11	9.00	16	152/148M	-	3550	850	3150	850	1044	298	14.0	YES	YES	YES	YES	D	C	2	73 -
109	295/80R22.5	HIGHWAY S11	9.00	18	154/149M	-	3750	850	3250	850	1044	298	14.0	YES	YES	YES	YES	D	C	2	73 HL
110	295/80R22.5	MIXED D12	9.00	18	154/149K	-	3750	850	3250	850	1044	298	18.5	YES	-	YES	-	-	-	-	-
111	295/80R22.5	MIXED G16	9.00	18	154/149K	-	3750	850	3250	850	1044	298	15.0	YES	-	-	-	-	-	-	-
112	295/80R22.5	REGIONAL D11	9.00	16	152/148M	-	3550	850	3150	850	1044	298	20.5	YES	YES	YES	YES	E	B	2	75 -
113	295/80R22.5	REGIONAL D16	9.00	16	152/148M	-	3550	850	3150	850	1044	298	17.5	YES	-	YES	YES	D	C	2	73 -
114	295/80R22.5	REGIONAL D17	9.00	18	152/149L	-	3550	900	3250	900	1044	298	17.0	YES	-	YES	-	-	-	-	-
115	295/80R22.5	REGIONAL S11	9.00	16	152/148M	-	3550	850	3150	850	1044	298	16.5	YES	YES	YES	YES	C	C	2	73 -
116	295/80R22.5	REGIONAL S11	9.00	18	154/149M	-	3750	850	3250	850	1044	298	16.5	YES	YES	YES	YES	C	C	2	73 HL
117	295/80R22.5	REGIONAL S17	9.00	18	152/149L	-	3550	900	3250	900	1044	298	14.0	YES	-	-	-	-	-	-	-
118	305/70R19.5	REGIONAL D12	9.00(8.25)	18	148/145M	-	3150	850	2900	850	923	305	16.0	YES	-	YES	YES	D	C	2	73 -
119	305/70R19.5	REGIONAL S15	9.00(8.25)	18	148/145M	-	3150	850	2900	850	923	305	13.5	YES	-	YES	YES	D	B	2	73 -
120	315/60R22.5	HIGHWAY D11	9.75	16	152/148L	-	3550	900	3150	900	950	313	16.5	YES	YES	YES	YES	C	C	2	75 -
121	315/60R22.5	HIGHWAY S11	9.75	16	152/148L	-	3550	900	3150	900	950	313	14.5	YES	YES	YES	YES	D	C	2	73 -
122	315/60R22.5	HIGHWAY S11	9.75	18	154/150L	152/148M	3750	900	3350	900	950	313	14.5	YES	YES	YES	YES	D	C	2	73 HL
123	315/60R22.5	REGIONAL D11	9.75	16	152/148L	-	3550	900	3150	900	950	313	19.5	YES	YES	YES	YES	E	B	2	75 -
124	315/60R22.5	REGIONAL S11	9.75	16	152/148L	-	3550	900	3150	900	950	313	14.5	YES	YES	YES	YES	C	C	2	73 -
125	315/60R22.5	REGIONAL S11	9.75	18	154/150L	152/148M	3750	900	3350	900	950	313	14.5	YES	YES	YES	YES	C	C	2	73 HL
126	315/70R22.5	HIGHWAY D11	9.00	16	154/150L	152/148M	3750	900	3350	900	1014	312	16.5	YES	YES	YES	YES	C	C	2	75 -
127	315/70R22.5	HIGHWAY D11	9.00	18	156/150L	154/150M	4000	900	3350	900	1014	312	16.5	YES	YES	YES	YES	C	C	2	75 HL
128	315/70R22.5	HIGHWAY S11	9.00	16	154/150L	152/148M	3750	900	3350	900	1014	312	15.0	YES	YES	YES	YES	D	C	2	73 -
129	315/70R22.5	HIGHWAY S11	9.00	18	156/150L	154/150M	4000	900	3350	900	1014	312	15.0	YES	YES	YES	YES	D	C	2	73 HL
130	315/70R22.5	REGIONAL D11	9.00	16	154/150L	152/148M	3750	900	3350	900	1014	312	20.0	YES	YES	YES	YES	E	B	2	75 -
131	315/70R22.5	REGIONAL D11	9.00	18	156/150L	154/150M	4000	900	3350	900	1014	312	20.0	YES	YES	YES	YES	E	B	2	75 HL
132	315/70R22.5	REGIONAL S11	9.00	16	154/150L	152/148M	3750	900	3350	900	1014	312	15.5	YES	YES	YES	YES	C	C	2	73 -
133	315/70R22.5	REGIONAL S11	9.00	18	156/150L	154/150M	4000	900	3350	900	1014	312	15.5	YES	YES	YES	YES	C	C	2	73 HL
134	315/80R22.5	HIGHWAY D11	9.00	18	154/150M	-	3750	825	3350	825	1076	312	17.0	YES	YES	YES	YES	C	C	2	75 -
135	315/80R22.5	HIGHWAY D11	9.00	20	156/150L	154/150M	4000	850	3350	850	1076	312	17.0	YES	YES	YES	YES	C	C	2	75 -
136	315/80R22.5	HIGHWAY S11	9.00	18	154/150M	-	3750	825	3350	825	1076	312	15.0	YES	YES	YES	YES	D	C	2	73 -
137	315/80R22.5	HIGHWAY S11	9.00	20	156/150L	154/150M	4000	850	3350	850	1076	312	15.0	YES	YES	YES	YES	D	C	2	73 -
138	315/80R22.5	HIGHWAY S11	9.00	22	158/150L	154/150M	4250	900	3350	900	1076	312	15.0	YES	YES	YES	YES	D	C	2	73 HL
139	315/80R22.5	MIXED D11	9.00	20	156/150K	-	4000	850	3350	850	1076	312	21.0	YES	YES	YES	YES	D	B	2	73 -
140	315/80R22.5	MIXED G11	9.00	18	154/150M	-	3750	825	3350	825	1076	312	17.0	YES	YES	YES	YES	D	B	2	73 -
141	315/80R22.5	MIXED G11	9.00	20	156/150L	-	4000	850	3350	850	1076	312	17.0	YES	YES	YES	YES	D	B	2	73 -
142	315/80R22.5	MIXED G11	9.00	20	157/154K	-	4125	900	3750	900	1076	312	17.0	YES	-	-	-	-	-	-	-
143	315/80R22.5	MIXED G15	9.00	18	154/150K	-	3750	825	3350	825	1076	312	19.0	YES	YES	YES	YES	D	B	2	73 -
144	315/80R22.5	MIXED G15	9.00	20	156/150K	-	4000	850	3350	850	1076	312	19.0	YES	YES	YES	YES	D	B	2	73 -
145	315/80R22.5	MIXED G15	9.00	22	158/150K	-	4250	900	3350	900	1076	312	19.0	YES	YES	YES	YES	D	B	2	73 -
146	315/80R22.5	REGIONAL D11	9.00	18	154/150M	-	3750	825	3350	825	1076	312	22.0	YES	YES	YES	YES	E	B	2	75 -
147	315/80R22.5	REGIONAL D11	9.00	20	156/150L	154/150M	4000	850	3350	850	1076	312	22.0	YES	YES	YES	YES	E	B	2	75 -
148	315/80R22.5	REGIONAL S11	9.00	20	156/150L	154/150M	4000	850	3350	850	1076	312	15.5	YES	YES	YES	YES	C	C	2	73 -
149	315/80R22.5	REGIONAL S11	9.00	22	158/150L	154/150M	4250	900	3350	900	1076	312	15.5	YES	YES	YES	YES	C	C	2	73 HL
150	385/55R19.5	HIGHWAY T11	12.25	18	156J	-	4000	900	-	-	919	386	12.5	YES	YES	YES	-	C	C	2	73 -
151	385/55R22.5	HIGHWAY S11	12.25	18	158L	-	4250	850	-	-	996	386	12.0	YES	YES	YES	YES	D	C	2	73 -
152	385/55R22.5	HIGHWAY S11	12.25	20	160K	158L	4500	900	-	-	996	386	12.0	YES	YES	YES	YES	D	C	2	73 -
153	385/55R22.5	HIGHWAY T11	12.25	18	158L	-	4250	850	-	-	996	386	12.0	YES	-	YES	-	C	C	2	73 -
154	385/55R22.5	HIGHWAY T11	12.25	20	160K	158L	4500	900	-	-	996	386	12.0	YES	-	YES	-	C	C	2	73 -
155	385/55R22.5	REGIONAL S11	12.25	18	158L	-	4250	850	-	-	996	386	13.5	YES	YES	YES	YES	C	C	2	73 -
156	385/55R22.5	REGIONAL S11	12.25	20	160K	158L	4500	900	-	-	996	386	13.5	YES	YES	YES	YES	C	C	2	73 -
157	385/55R22.5	REGIONAL T15	12.25	18	158L	-	4250	850	-	-	996	386	16.5	YES	-	YES	-	D	B	2	73 -
158	385/55R22.5	REGIONAL T15	12.25	20	160J	158L	4500	900	-	-	996	386	16.5	YES	-	YES	-	D	B	2	73 -
159	385/65R22.5	HIGHWAY T11	11.75	20	160K	158L	4500	900	-	-	1072	389	13.5	YES	YES	YES	-	C	C	2	73 -
160	385/65R22.5	HIGHWAY T11	11.75	24	164K	158L	5000	900	-	-	1072	389	13.5	YES	YES	YES	-	C	C	2	73 HL

No.	Size	HT Pattern	Rim	Ply Rating	LI/SS	Second LI/SS	Max. Load (Single-KG)	Max. Pressure (Single-KPa)	Max. Load (Dual-KG)	Max. Pressure (Dual-KPa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	DOT	M+S	3PMSF	EU-RR (Level)	EU-WG (Level)	EU-N (Level)	EU-N (dB)	HL	
161	385/65R22.5	MIXED G12	11.75	18	158L	-	4250	850	-	-	1072	389	18.0	YES	-	YES	-	D	C	2	73	-
162	385/65R22.5	MIXED G12	11.75	20	160K	158L	4500	900	-	-	1072	389	18.0	YES	-	YES	-	D	C	2	73	-
163	385/65R22.5	MIXED G12	11.75	24	164J	-	5000	900	-	-	1072	389	18.0	YES	-	YES	-	D	C	2	73	-
164	385/65R22.5	REGIONAL G15	11.75	18	158K	-	4250	850	-	-	1072	389	16.5	YES	-	YES	-	D	C	2	73	-
165	385/65R22.5	REGIONAL G15	11.75	18	158K	-	4250	830	-	-	1072	389	16.5	YES	-	-	-	-	-	-	-	-
166	385/65R22.5	REGIONAL G15	11.75	20	160J	-	4500	900	-	-	1072	389	16.5	YES	-	YES	-	D	C	2	73	-
167	385/65R22.5	REGIONAL G15	11.75	20	160J	-	4500	900	-	-	1072	389	16.5	YES	-	-	-	-	-	-	-	-
168	385/65R22.5	REGIONAL G15	11.75	24	164J	-	5000	900	-	-	1072	389	16.5	YES	-	YES	-	D	C	2	73	-
169	385/65R22.5	REGIONAL S11	11.75	20	160K	158L	4500	900	-	-	1072	389	15.5	YES	YES	YES	YES	C	C	2	73	-
170	385/65R22.5	REGIONAL S11	11.75	24	164K	158L	5000	900	-	-	1072	389	15.5	YES	YES	YES	YES	C	C	2	73	HL
171	385/65R22.5	REGIONAL S16	11.75	20	160J	-	4500	900	-	-	1072	389	13.0	YES	YES	YES	-	D	C	2	73	-
172	385/65R22.5	REGIONAL S16	11.75	20	160K	158L	4500	900	-	-	1072	389	13.0	YES	YES	YES	-	D	C	2	73	-
173	385/65R22.5	REGIONAL S16	11.75	24	164J	-	5000	900	-	-	1072	389	13.0	YES	YES	YES	-	D	C	2	73	-
174	385/65R22.5	REGIONAL T15	11.75	20	160J	158L	4500	900	-	-	1072	389	16.5	YES	-	YES	-	D	B	2	73	-
175	385/65R22.5	REGIONAL T15	11.75	24	164J	-	5000	900	-	-	1072	389	16.5	YES	-	YES	-	D	B	2	73	-
176	425/65R22.5	HIGHWAY T11	12.25	20	165K	-	5150	825	-	-	1124	422	14.5	YES	-	YES	-	C	C	2	73	-
177	425/65R22.5	MIXED G12	12.25	20	165K	-	5150	825	-	-	1124	430	18.5	YES	-	YES	-	D	C	2	73	-
178	425/65R22.5	REGIONAL G12	12.25	18	162K	-	4750	760	-	-	1124	422	17.5	YES	-	-	-	-	-	-	-	-
179	425/65R22.5	REGIONAL G12	12.25	20	165J	-	5150	825	-	-	1124	430	17.5	YES	-	YES	-	D	B	2	73	-
180	425/65R22.5	REGIONAL G12	12.25	20	165J	-	5150	830	-	-	1124	422	17.5	YES	-	-	-	-	-	-	-	-
181	435/50R19.5	HIGHWAY T11	14.00	18	156J	-	4000	850	-	-	931	438	12.5	YES	YES	YES	-	C	C	2	73	-
182	435/50R19.5	HIGHWAY T11	14.00	20	160J	-	4500	900	-	-	931	438	12.5	YES	YES	YES	-	C	C	2	73	-
183	445/45R19.5	HIGHWAY T11	15.00	18	156J	-	4000	900	-	-	895	446	12.5	YES	YES	YES	-	C	C	2	73	-
184	445/45R19.5	HIGHWAY T11	15.00	20	160J	-	4500	900	-	-	895	446	12.5	YES	YES	YES	-	C	C	2	73	-
185	445/50R22.5	HIGHWAY D15	14.00	20	161L	-	4625	830	-	-	1024	445	20.0	YES	-	-	-	-	-	-	-	-
186	445/50R22.5	HIGHWAY T12	14.00	18	155L	-	3875	700	-	-	1018	445	10.5	YES	-	-	-	-	-	-	-	-
187	445/50R22.5	HIGHWAY T12	14.00	18	158L	-	4250	760	-	-	1018	445	10.5	YES	-	-	-	-	-	-	-	-
188	445/50R22.5	HIGHWAY T12	14.00	20	161L	-	4625	830	-	-	1018	445	10.5	YES	-	-	-	-	-	-	-	-
189	445/50R22.5	HIGHWAY T12	14.00	20	161L	-	4625	850	-	-	1018	445	10.5	YES	-	-	-	-	-	-	-	-
190	445/65R22.5	MIXED T11	13.00	20	168K	-	5600	830	-	-	1150	444	18.0	YES	-	YES	YES	D	B	2	73	-
191	445/65R22.5	MIXED T11	13.00	20	169J/K	-	5800	900	-	-	1150	454	18.0	YES	-	YES	YES	D	B	2	73	-
192	445/65R22.5	REGIONAL T15	14.00	20	169J	-	5800	900	-	-	1150	454	18.0	YES	-	YES	-	D	B	2	73	-



LIMITED WARRANTY FOR TIRES MANUFACTURED BY HUBTRAC

Limited Warranty Policy

This limited warranty policy is applicable to tires manufactured by LINGLONG TIRE bearing HUBTRAC brand name and complete D.O.T. serial identification number. Subject to the terms and conditions set out herein, LINGLONG TIRE hereby warrants and certifies that tires supplied to its Customer (Buyer) are warranted against failure to complete their satisfactory life as a result of any inherent deficiency relating to workmanship or material.

Duration of warranty and conditions

A. The warranty period is limited to a maximum of 6 years (72 months) from the date of manufacture and/or shall terminate once the tread is worn to TWI (Tread Wear Indicator) ,whichever occurs first.

B. Before using, any new tire found with appearance deficiency as stated in item 1 will be replaced with a same new tire at no charge.

C. Tires that have become unserviceable as stated in item 1 shall be compensated in value according to FOB price based on percentage of tread depth remaining.

What is not warranted ?

Tires that become unserviceable for the following reasons:

- Road hazard injuries or damages caused by obstacles or debris, such as cuts, punctures (whether repairable or not), snags, bruises, tears, abrasions or impact breaks.
- Improper repairs or repairs that have failed.
- Improper inflation or other maintenance abuses.
- Improper application.
- Improper mounting/dismounting or improper balance.
- Mechanical irregularities such as bent wheel assemblies, misalignment worn or faulty components.
- Accident, corrosion, tire alteration, vandalism, fire, theft or damages cause by nature.
- Damage from over or under inflation, overloading, defective vehicle mechanical conditions.
- Racing, off road use and misapplication
- Ozone or weather cracking or other abuse, misuse, tire alteration, run flat.
- Tire which D.O.T identification number and/or brand name removed intentionally.
- Tires that have been modified after leaving the factory , such as fillers, sealants, balancing substances and external tire treatments or materials of any kind. If the added material is the cause of a failure, a tire will not be accepted for warranty claim.
- Abnormal tread wear resulting from improper installation, wheel misalignment, tire/wheel assembly imbalance, etc.
- Vehicles or tires operated in excess of the rated Work Capacity Factor.
- Additional monetary loss, such as damage of the vehicle or time, etc.

Compensation under the warranty

Any compensation made pursuant to this warranty shall be according to Invoice FOB price calculated based on percentage of tread remaining.

EXAMPLE:

If your disabled tire had an original tread depth 8mm and was worn by 4mm, you shall receive 50% compensation according to Invoice FOB price of the same tire.

To make a claim under this limited warranty

- Present your tires and the original purchase receipt to point of purchase or any LINGLONG TIRE dealer.
- Complete and sign the Claim Adjustment form provided, keep a copy for your records and leave the tire with the dealer to process the warranty claim.

Owner's obligation

- At the time of purchase, tires must be properly installed with recommended inflation and balanced. Observe rotation and alignment regularly according to recommendations.
- Refer to any authorized LINGLONG dealer or point of purchase for adjustment claim.
- Owner is responsible for service charges and applicable taxes.
- Submit a copy of the original purchase receipt to support the adjustment claim.


Dealer's obligation and claim process

- HUBTRAC's authorized dealer or customer (buyer) submit adjustment claim along with a cut-out slice of full DOT serial from the disabled tire, measurements of tread remaining, photos showing tread area as well as damage area, etc. To LINGLONG TIRE to validate and process the adjustment claim.
- Any other information such as VIN(Vehicle Identification Number) or relevant information/material must be submitted if required.

Tire care and maintenance guide

Tire failure can result in serious damage and/or personal injury. To reduce these risks we recommend the following :

- Maintain proper inflation, do not under or over inflate. Always maintain inflation according to the vehicle manufacturer ' s or Linglong's recommendations.
- Wheel alignment and balancing should be checked at regular intervals.
- Do not overload, refer to load carrying capacity information molded on tire sidewall.
- Avoid spinning, driving over curbs, potholes, obstacles and edges of pavement.
- Never drive with smooth(bald) tires. By law, tires must be replaced when worn to TWI (tread wear indicator).
- Check your tires frequently for any damage such as scrapes, cuts, foreign objects, separations or bulges. If damaged replace it with spare and refer to an authorized dealer.
- Do not drive in excess of permitted speed limits and beyond the maximum specified by tire.
- To achieve proper wear and optimize tread life, tire rotation at regular intervals is recommended.

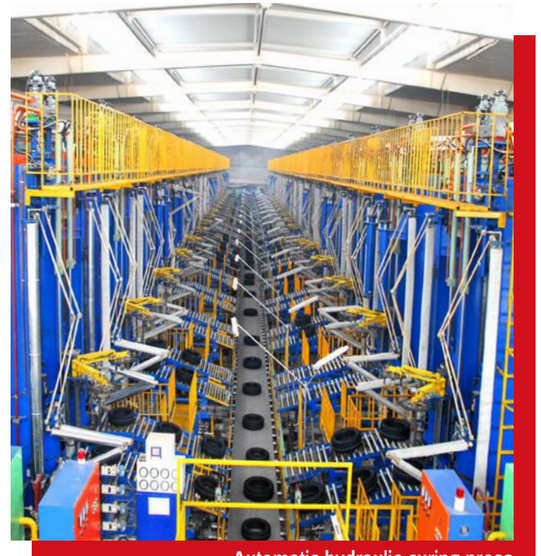

Automatic hydraulic curing press

HUBTRAC TYRES

JOURNEY TO THE FUTURE

SHANDONG LINGLONG TYRE CO., LTD.

CONTACT: info@hubtractyre.com

WEB: https://en.linglong.cn/